

03-29-00

A

PTO-1082

Case Docket No. BLD990050US1

0036.0060

March 27, 2000

Express Mail Label No. EL414495466US

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): D.K. Dittrich; L.M. Ernst; and R.S. Lucky

For: **METHOD, SYSTEM, AND PROGRAM FOR REDUCING TONER USAGE IN PRINT OUTPUT**

Enclosed are:

- ☒ 5 No. of Sheets of Drawings Sheet(s) of drawings ( ☒ informal) + 0 extra copies;  
26 pages of Application; 18 pages of specification, 1 page of abstract  
☒ An assignment of the invention to International Business Machines Corporation. ( ☐ Will follow.)  
☐ An associate power of attorney.  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 1.27.  
☒ Declaration and Power of Attorney. ( ☐ Will follow.)  
☐ Certified copy of Patent Application No. filed from which priority is claimed under 35 U.S.C. §119.  
☐ IDS enclosed. ☐ with references.

CALCULATION OF FEES					
ITEM	NO. OF CLAIMS FILED MINUS BASE*	NO. OF CLAIMS OVER BASE	X SM/LG ENTITY FEE	\$ AMOUNT	\$ FEE
A TOTAL CLAIMS FEE	38 - 20* =	18	X \$9 or \$18	\$324	
B INDEPENDENT CLAIMS FEE**	3 - 3* =	0	X \$39 or \$78	\$0	
C SUBTOTAL - ADDITIONAL CLAIMS FEE (ADD FINAL COLUMN IN LINES A + B)					324
D MULTIPLE-DEPENDENT CLAIMS FEE				SMALL ENTITY FEE = \$130; LARGE ENTITY FEE = \$260	\$0
E BASIC FEE*				SMALL ENTITY FEE = \$345; LARGE ENTITY FEE = \$690	\$690
F TOTAL FILING FEE (ADD TOTALS FOR LINES C, D, AND E)					\$1,014
G ASSIGNMENT RECORDING FEE				\$ 40	\$40
**LIST INDEPENDENT CLAIMS 1, 15, 29					

Please charge Dep. Acct. No. 50-0585 in the amount of

\$

**A copy of this sheet is enclosed.**

- ☒ A check in the amount of \$ 1,014 to cover the filing fee is enclosed.  
☒ Check for \$ 40 covering the Recordation of Assignment fee enclosed.  
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0585. **A copy of this sheet is enclosed.**  
☒ Any additional filing fees required under 37 CFR 1.16.  
☒ Any patent application processing fees under 37 CFR 1.17.  
☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 50-0585. **A copy of this sheet is enclosed.**  
☐ Any patent application processing fees under 37 CFR 1.17.  
☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).  
☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

David W. Victor  
Registration No. 39,867

Direct All Correspondence to:

David W. Victor  
KONRAD RAYNES & VICTOR LLP  
1180 S. Beverly Drive; Suite 501  
Los Angeles, CA 90035

Direct Telephone Calls to:

(310) 556-7983

1c525 U.S. PTO  
09/53859  
03/27/00

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

For: **METHOD, SYSTEM, AND  
PROGRAM FOR REDUCING TONER  
USAGE IN PRINT OUTPUT**

(Signature)

METHOD, SYSTEM, AND PROGRAM FOR REDUCING  
TONER USAGE IN PRINT OUTPUT

Cross-Reference to Related Applications

5        This application is related to the following co-pending and commonly-assigned patent applications, all of which are filed on the same date herewith, and all of which are incorporated herein by reference in their entirety:

10        "Method, System, And Program For Using Look-up Tables to Filter Raster Data", by Richard S. Lucky, Larry M. Ernst, and Danielle K. Dittrich, having attorney docket no. BLD990048US1; and  
      "Method, System, And Program For Producing a Look-up Table to Enhance Print Quality", by Danielle K. Dittrich, Larry M. Ernst, and Richard S. Lucky, having attorney docket no. BLD990036US1.

15        BACKGROUND OF THE INVENTION

1.        Field of the Invention

      The present invention relates to a method, system and program for reducing toner usage in print output.

20        2.        Description of the Related Art

      To print an image, a print engine processor, referred to herein as a raster image processor, converts the image in a page description language or vector graphics format to a bit mapped image indicating a value to print at each pixel of the image. Each bit representing a pixel that is "on" is converted to an electronic pulse. The  
25        electronic pulses generated from the raster pel data at which to deposit toner turns the laser beam on to positively charge the surface of a rotating drum, which is an organic photo-conducting cartridge (OPC), that has a coating capable of holding an electrostatic charge. The laser beam turns on and off to beam charges at pixel areas on a scan line across the drum that will ultimately represent the output image. After

the laser beam charges all pels on the scan line indicated in the raster data, the drum rotates so the laser beam can place charges on the next scan line. The drum with the electrostatic positive charges then passes over negatively charged toner. The negatively charged toner is then attracted to the positive charged areas of the drum  
5 that form the image. The paper, which is negatively charged, passes over the roller drum and attracts the toner as the areas of the roller drum with the toner are positively charged to transfer the toner forming the image from the roller drum to the paper.

Many laser printers may filter the bit map images using a look-up table to alter  
10 the pulses generated for each pixel to accomplish a certain filtering result. For instance, filters can be used to provide an economy mode where toner is reduced, remove jagged edges, improve print quality enhancement or reduce the density of images. Typically, the laser printer will gather an area of data and replace either one or all the pulse values for the pixels based on the gathered area of pixel data matching  
15 a value in the look-up table. Such look-up tables modify the pixel output by altering the pulse normally used for an "on" pixel value with a pulse width modulator to shorten the pulse width to reduce the electric charge the laser beam places on the roller. Reducing the pulse width reduces the charged are for the pel on the roller and, hence, reduces the amount of toner attracted to the roller for that pel, thus reducing  
20 the amount of toner used to represent the pel.

There are two prior art techniques for reducing the amount of toner in print output. One technique, referred to as sub-pulse width modulation, reduces the laser current applied to each pel area on the roller to reduce the area of the electrical charge applied to the pel position on the roller, thereby attracting less toner. This  
25 technique requires that the laser be constantly switched on and off within each pel to place the sub-pel charge in a portion of the pel on the roller. This process of switching the laser on and off substantially increases electromagnetic radiation (EMI). To ensure that such printers that reduce tone by switching the laser on and off within each pixel comply with established EMI rules in various countries, electromagnetic

patches are added to the printer to absorb the EMI radiation. The addition of these electromagnetic patches or other fixes to avoid the EMI radiation pollution significantly increases the manufacturing cost of the printer to a point where the use of sub-pulse width modulation to reduce toner usage in all black areas is not feasible.

5           A second approach to reduce toner usage is to apply a single symmetrical screen pattern, e.g., a checkerboard, over the total image to subtract pels from the image. Thus, the entire black area of an image is replaced with a checker board pattern to reduce in half the number of pels to which toner is attracted. The problem with this approach is that because data is removed without any consideration to the  
10 image structure, it is possible that the algorithm would delete significant portions of the image, such as edge pels that form the outline of the image. This reduces the edge resolution and quality of the image resulting in a "washed-out" appearance.

For the above reasons, there is a need in the art for an improved technique to reduce toner in an image in a manner that does not unduly degrade the quality of the  
15 image and to reduce electronic emissions.

#### SUMMARY OF THE PREFERRED EMBODIMENTS

To overcome the limitations in the prior art described above, preferred embodiments disclose a method, system, and program for reducing toner in an image  
20 comprised of raster pel data. A determination is made of pels surrounding subject pels. For each subject pel, a sub-pulse width power is generated to charge a sub-pel region within the subject pel based on a pattern of the surrounding pels of the subject pel. Further, for each subject pel, position information is generated indicating an alignment of the sub-pel region in the pel. The position information is used to position  
25 the sub-pel region produced by the sub-pulse width power in the pel.

Still further, for each subject pel, a determination is made as to whether the pattern of the surrounding pels indicate that the subject pel is in a black filled region. The position information is used to align the sub-pel regions in the subject pels in the

black filled region to be adjacent to the sub-pel region in one adjacent subject pel in the black filled region.

In still further embodiments, the sub-pulse width power and position information is encoded in a look-up table that provides one output sub-pulse width power and position information for an input subject pel and surrounding pel pattern.

Preferred embodiments provide a technique for sub-pulse width modulation to reduce toner usage that minimizes EMI radiation by using position information to align sub-pel regions formed by the sub-pulse width modulations in adjacent pels next to each other so the laser beam does not have to turn on and off within every pel when generating the sub-pel regions in the black filled region. The preferred embodiment technique minimizes the number of times the laser beam must turn on and off to form sub-pel regions in pels in a black filled region to reduce toner usage. Further, with preferred embodiments, pels on an image edge are preserved and not eliminated as part of the toner reduction algorithm. This preserves image quality and avoids producing a "washed-out" appearance of the image by avoiding removal of edge pels that define the outline of an image.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

FIG. 1 illustrates a printing computing environment in which preferred embodiments of the present invention are implemented;

FIG. 2 illustrates a window of pel data accessed for filtering operations in accordance with preferred embodiments of the present invention;

FIG. 3 illustrates a pattern for applying sub-pel regions to pels to reduce toner usage in accordance with preferred embodiments of the present invention;

FIG. 4 illustrates how surrounding pels are considered for a subject pel to determine the toner reduction filtering operation for the subject pel in accordance with preferred embodiments of the present invention;

FIG. 5 illustrates toner reduction logic implemented in the filter logic to reduce toner in accordance with preferred embodiments of the present invention; and

FIG. 6 illustrates patterns indicating that the center pel is on an image edge.

5        DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following description, reference is made to the accompanying drawings which form a part hereof and which illustrate several embodiments of the present invention. It is understood that other embodiments may be utilized and structural and operational changes may be made without departing from the scope of the present  
10    invention.

Using Multiple Look-Up Tables to Filter an Image

FIG. 1 illustrates a printing computing environment in which preferred embodiments are implemented. Control logic 4 comprises a programmable chip, such  
15    as a field programmable gate array (FPGA) chip, which includes logic to perform the preferred embodiment pel filtering operations. The raster processor 6 generates raster data 8 from vector graphics or page description language commands. The raster data 8 comprises scan lines of pels, where each pel has an "on" or "off" value and location information of the pel in the scan line. The control logic 4 accesses scan lines of  
20    raster data 8 and transfers the pels to a scan static random access memory (SRAM) 10. The control logic 4 will access data from the scan SRAM 10 and compare the accessed pel data with values in one of a selected look-up table (LUT) 14a, b, c, d that were previously loaded in a LUT SRAM 12. The control logic 4 is encoded with logic to compare accessed pel data with the LUT 14a, b, c or d to determine an output  
25    value for input pel data.

In the example of FIG. 1, the control logic 4 uses the LUTs 14a, b, c, d to accomplish a particular type of filter operation, e.g., print quality enhancement of text, images or double dot data, or toner reduction. Print quality enhancement may involve edge smoothing, compensating for density, etc.

The LUT tables 14a, b, c, d specify how to modify a pel based on the values of the surrounding pels. A pel is modified by modifying its pulse width. The modified or unmodified pel data, i.e., pulse width, is then transferred directly from one selected LUT 14a, b, c, or d to the pulse width modulator (PWM) 18 to generate an electronic pulse, i.e., voltage, which controls the laser beam 20 to electrically charge the area of the roller corresponding to the pel as part of the printing process. In preferred embodiments, the PWM 18 is capable of generating sixty-four different pulse widths for a pel having a value of "on".

FIG. 2 illustrates how scan line raster data is loaded into the scan SRAM 10 and accessed by the control logic 4. In FIG. 2, each block represents a pel, a white block represents buffered pel data and a darkened block represents one pel the control logic 4 is accessing in a window 30 of pels that will be considered during the filter operation. In preferred embodiments, the control logic 4 accesses a diamond shaped group of adjacent pels 30 from five different scan lines 34, 36, 38, 40, 42 that surround a center pel 32. In preferred embodiments, one or more of the LUTs 14a, b, c or d include an output value for each possible combination of values for the window 30. In the example of FIG. 2, this would require the LUTs 14a, b, c, d to provide  $2^{13}$  possible output values as there are  $2^{13}$  different possible arrangements of the thirteen pels in the window 30. Thus, the LUTs 14a, b, c, d specify an output value for each unique combination of the pels in the window 30. The output value provides an adjusted pulse width for the center pel 32 in the window 30. The purpose of the window is to provide an adjusted pulse for the center pel 32 based on the surrounding pels that have the most affect on the center pel 32.

In preferred embodiments, the window 30 is shaped as a diamond to approximate the circular shape of a charge the laser creates on the roller and the shape in which toner is applied to a pel. The toner applied to a pel may extend out in a circular range and affect other pels. Thus, based on the value of the pels surrounding the center pel 32, the LUTs 14a, b, c, d provide an adjusted pulse width value for the center pel 32 to accomplish the purpose of the LUT, e.g., print quality



enhancement, toner reduction, etc., in a manner known in the art. The co-pending patent application entitled "Method, System, And Program For Producing a Look-up Table to Enhance Print Quality", having attorney docket number BLD990036, which was incorporated by reference in its entirety above, provides methodologies for  
5 creating the LUT tables 14a, b, c, d to accomplish the purpose of the LUT table operation.

In preferred embodiments the scan SRAM 10 comprises a 32K x 8 SRAM and a set of shift registers. The raster data 8 is delivered in a serial bit stream to the scan SRAM 10, such that eight bits are shifted in and written to the byte wide scan SRAM  
10 10 every eight clocks. The control logic 4 gathers the raster data 8 one bit at a time and writes to the scan SRAM 10 once every eight bits. The pels in the window 30 are read by reading the first four scan lines 34, 36, 38, and 40 one at a time. The bottom scan line 42, which provides one pel to the window 30, is the input scan line being written to the SRAM 10 by the filter logic 14. The window 30 shifts right through the  
15 scan lines. After processing all pels in a scan line as the center pel 32, the window 30 would shift down in the transport direction to start including subsequent scan lines in the window 30. In this way, every pel in the bitmap at one point is the center pel 32 in the window 30 that is adjusted based on the values of the surrounding pels in the window. In preferred embodiments, only the original pel values from the raster data 8  
20 are used in each window 30. Thus, after the center pel 32 is adjusted, when that previous center pel becomes a pel surrounding a center pel 32 in the window 30, the original value of that center pel from the raster data 8 is used, and not the adjusted pulse width value.

The preferred embodiment diamond shaped window 30 provides an improved  
25 data sampling over current windows used in filtering pels that are typically rectangular or square shaped, because the diamond shape approximates the actual shape of the laser charge imprint. Thus, the pels most likely to affect the center pel 32 are in the circular diamond shaped window 30. Because, in preferred embodiments, the LUTs provide an output value for every possible combination of

pels in the window, minimizing the number of pels in the window by using a diamond shaped window as opposed to a rectangular shape, which includes a greater area of pels, makes it feasible for the LUTs 14a, b, c, d to provide one output value for every possible combination of pels in the window 30. Further, the diamond shaped window 30 considers the affect of surrounding pels to the north, south, east, and west of the center pel 32 as would a rectangular shaped window, but excludes four pels that would be included in a rectangular window that have less of an affect on the center pel 32 as they are farther from the center pel 32 than any pels in the diamond shaped window 30 and are generally outside of the circular radius of a charge for a pel.

10 In preferred embodiments, the control logic 4 may, in the middle of generating pels within a page and/or a scan line, switch the LUT 14a, b, c, d being used to alter the type of filter operation. For instance, this would allow a single scan line to include image data that needs to be generated with high quality that would require the image print quality enhancement LUT and algorithm as well as content that may be  
15 generated in an economy mode using the toner reduction LUT and algorithm. A toner reduction LUT would tend to reduce the pulse width for each pel, thereby reducing the size of the charged area on the roller exposed to the laser beam and the amount of toner that would gather at the charged area.

In preferred embodiments, the control logic 4 may, in the middle of generating  
20 pels within a page and/or a scan line, switch the LUT 14a, b, c, d to alter the type of filter operation. For instance, this would allow a single scan line to include image data that needs to be generated with high quality that would require the image print quality enhancement LUT as well as content that may be generated in an economy mode using the toner reduction LUT. A toner reduction LUT would tend to reduce  
25 the pulse width for each pel, thereby reducing the size of the charged area on the roller exposed to the laser beam and the amount of toner that would gather at the charged area.

To provide information on which print mode to use, e.g, print quality enhancement for image, text or double dot or toner reduction, the raster data 8 may

include switching points and a new print mode for a switching point. A switching point would comprise a scan line, i.e., transport position, and pel position within the scan line at which to change the print mode. An additional mode is bypass mode. In bypass mode, the serial data is sent directly to the printer engine without being stored in the scan SRAM 10 and without being filtered using the LUTs 14a, b, c, d. Initially, the control logic 4 is in bypass mode until changed as a result of a switching point. Further, upon initialization, all the LUTs 14a, b, c, d are loaded into the LUT SRAM 12 from a non-volatile storage location, such as disk or flash memory. In this way, all the LUT tables 14a, b, c, d are readily accessible to the control logic 4. The

10 copending patent application entitled ""Method, System, And Program For Using Look-up Tables to Filter Raster Data", having attorney docket no. BLD990048US1 and which was incorporated by reference above, provides further details of the process of switching the LUTs 14a, b, c when processing the pels in a scan line.

15 Reducing Toner Using Location Information

As discussed, one of the LUTs 14a, b, c or d is used to reduce the amount of toner used in the print output. In preferred embodiments, the control logic 4 includes logic to apply different techniques for reducing toner depending on whether a subject pel, which is the current pel the control logic 4 is considering and determining how to

20 modify, is in a dense black filled area or on an image edge. If a subject pel is in a dense black filled area, then the toner reduction LUT is encoded to reduce the pulse width to attract less toner. In such case, image quality is not adversely affected as the reduction is made in an all black area, i.e., there is no effect on the image edges. However, in preferred embodiments, if the pel is on the edge of an image, then the

25 LUT will be encoded to provide a sub-pel pulse width at the edge pel, so the edge definition is not removed in order to fully delineate the edge transitions from a black area (toner area) to a white area (no toner area). Further, in preferred embodiments, the toner reduction LUT may indicate less toner usage for the edge pel than the pels in the middle of the black filled area. The benefit of using less toner for the edge pels

than the pels in the black filled area is to maintain the halftone monotonic in the image. This means that there is an increasing reduction in density as the image progresses from the black filled area to the white area. Further, using less toner in an edge pel reduces any spillover of the edge pel into the adjacent white pel, which  
5 would blur the image and produce jaggedness.

In preferred embodiments, to save toner in a black filled area using sub-pulse width modulation and to avoid the problem of constantly having to switch the laser beam on and off in each pel, preferred embodiments align the sub-pulse width within each pel so the sub-pel charge region in every pel is aligned flush with the sub-pel  
10 region in one adjacent pel. FIG. 3 illustrates the result of this process. Assuming that the 4 x 4 block of pels 50 shown in FIG. 3 is contained in an all black filled area of print output, the preferred embodiments would align the sub-pel regions printed in each pel so that the sub-pel region in each pel is adjacent to the sub-pel region in one adjacent pel. This alignment of the sub-pel regions reduces the number of times the  
15 laser beam has to be switched on and off when doing sub-pulse width modulation as the laser beam may remain on to charge the sub-pel regions of two pels. For instance, in pel 52, the laser beam is turned on to charge the rightmost portion of pel 52 and remains on to charge the leftmost portion of pel 54, and then turns off, before turning on again in pel 56 to charge the adjacent sub-pel regions in pels 56 and 58. In this  
20 way, sub-pulse modulation can be used to reduce the amount of toner in all black areas and EMI radiation is likewise cut in half as a result of using the location information to align sub-pels of toner within the pels. With this preferred embodiment technique for sub-pulse width modulation, EMI radiation is reduced sufficiently to allow printers to be produced at a competitive and acceptable cost of  
25 manufacturing.

Further, to avoid having stripes appear through the toner reduced black area, in preferred embodiments, the alignment positions of the sub-pels are alternated every scan line, as shown in FIG. 3, to form a checkerboard pattern that avoids the appearance of stripes through the reduced toner region.

To determine whether to apply the sub-pel checkerboard pattern shown in FIG. 3, in preferred embodiments, after accessing a window of data 30 (FIG. 3), the control logic 4 would further consider a cross of pels 64 within the diamond shaped window 60, as shown in FIG. 4. This cross of black pels 64 can be used to determine whether the center pel 62 is within an all black filled area. If all the pels in the cross 64 are black, then the center pel 62 is within an all black region. This allows the LUT to be encoded to provide the aligned sub-pel pattern described above for those center pels 62 that are definitely in an all black region. For those pels that are not in an all black region, alternative toner reduction steps can be taken to ensure that edges are not harmed and image quality does not suffer when reducing the amount of toner.

In preferred embodiments, to produce the sub-pel checkerboard pattern shown in FIG. 3, the control logic 4 encodes position information into pels 66, 68, 70, and 72 of the window 60 of pels. The control logic 4 determines the position of a center pel 62 with respect to a 4x4 section of pels within the all black filled area. In this way, the scan lines are segmented into 4x4 sections of pels for purposes of encoding position information for the center pel 62, i.e., subject pel, being considered. The pels 66 and 70 include position information indicating the transport or vertical position of the center pel 62 in the 4x4 section and the pels 68 and 72 include position information indicating the scan or horizontal position of the center pel 62. Pels 74, 76, 78, and 80 in the window 60 include pel data from the image.

In preferred embodiments, the LUT output values include both a power level for the sub-pulse width modulation and position information indicating the alignment of the sub-pel charge region in the pel to accomplish the pattern shown in FIG. 3. This information directs the laser to generate a charge for the sub-pulse width duration at a particular alignment within the pel. As discussed, the pulse width modulator 18 may generate sub-pulse widths at increments of 1/64th of the full power that would be used in a single pel. Because position bits 66, 68, 70, 72 are provided to the toner reduction LUT, indicating a position at one of sixteen positions in the 4x4 block, the toner reduction LUT is encoded to ensure the alignment of the sub-pels to

provide the checkerboard pattern shown in the 4x4 block in FIG. 3. For example, the toner reduction LUT may be encoded to right align the center pel in the first position in each even scan line, and then alternate the right/left alignment in each subsequent pel. When the position information indicates a transport position of an odd scan line in the 4x4 block, then the toner reduction LUT is preferably encoded to left align the first sub-pel and alternate the alignment for each subsequent pel in the odd scan lines. In this way, the LUT is encoded to alternate the alignment order in odd and even scan lines or increment in the transport direction in the 4x4 block to ensure that the sub-pel regions are clustered to provide the checker board pattern shown in FIG. 3 that reduces EMI radiation and avoids ungainly vertical lines through the black filled region.

FIG. 5 illustrates logic implemented in the control logic 4 toner using the toner reduction LUT 14a, b, c or d to perform the preferred embodiment toner reduction operations. Control begins at block 100 with the control logic 4 beginning the toner reduction filtering operation of pels buffered in the scan SRAM 10. The control logic 4 initializes variables by setting (at block 102) the transport direction bits 66 and 70 and the scan direction bits 68 and 72 to zero and setting (at block 104) the center pel to the first pel position in the first scan line. From blocks 106 to 132, the control logic 4 performs loops to process the pels for each scan line  $i$  and in each pel position  $j$  within a scan line  $i$  that are buffered in the scan SRAM 10. Within these loops, the control logic 4 accesses a diamond window of pels, e.g., window 60 (FIG. 4) surrounding the center pel 62. If a cross of pels 64 surrounding the accessed center pel 62 within the window 60 are not all black (at block 112), then the center pel 64 is not in an all black filled region. In such case, the control logic 4 determines an output value for the center pel 62 from the toner reduction LUT for the pattern of the diamond shaped window 60 being considered, which includes all pel data.

As discussed, in preferred embodiments, the toner reduction LUT provides one output value for each possible pattern in the diamond shaped window 60. Otherwise, if all the pels in the cross 64 are black, then the control logic 4 encodes (at

block 116) the scan and transport position pels 66, 68, 70, and 72 with the current scan and transport position of the center pel 62 in the current 4x4 section and then determines (at block 114) the output value from toner reduction LUT operation based on the pattern of the diamond shaped window 60. In such case, the position information of the center pel 62 is used to determine the alignment of the sub-pel region in the pel, e.g., right or left justification, to produce the sub-pel checkerboard pattern shown in FIG. 3 that minimizes the EMI radiation from the sub-pel pulse width modulation operations.

After using the toner reduction LUT to determine one toner reducing output value for the center pel 62, the control logic 4 must then determine the appropriate scan and transport direction location bits for the next center pel with respect to the 4x4 segment of pels. For this purpose, if pel  $j$  is less than 3 (at block 118), i.e., the pel is in the first 4x4 section, then the scan direction bit is set (at block 120) to  $j$  plus one. Otherwise, if the pel  $j$  is greater than three, then the pel  $j$  is in another 4x4 section. To determine the offset in the 4x4 section of the next pel, the scan direction bit is set (at block 122) to the remainder of  $j$  divided by four. To determine the transport position in the 4x4 section, if the scan line is less than three (at block 124), then the transport direction bit is set (at block 126) to  $i$  plus one. Otherwise if the scan line  $i$  is greater than three (at block 124), then the scan line is at a transport position beyond the first 4x4 section. In such case, the transport direction bits 66 and 70 are set (at block 128) to  $i$  divided by four, to determine the offset within the 4x4 section.

With the above logic, the LUT output value for subject pels in an all black filled region is based on the position information encoded in the position bits 66, 68, 70, and 72. The toner reduction LUT is encoded to provide specific toner reduction sub-pulse widths for a pel based on the location of the center pel in the image. As discussed above, the toner reduction LUT is encoded with output values to form the sub-pel checkerboard pattern shown in FIG. 3 for those center pels in an all black filled area. For those pels that are not within an all black region, the LUT output value would take into account whether the center pel is at an image edge. The center

pel 62 is at an image edge if the data pels in the cross 64 and 74, 76, 78, and 80 match one of the patterns shown in FIGs. 6a, b, c, d. For such patterns in the window, the LUT could be encoded to provide a toner reduction value for the edge pel that preserves image quality. For instance, the toner reduction LUT could be encoded to provide an output value for such edge pel that has a lower pulse width than adjacent pels within the all black filled area of the image and that is justified to align toward the black filled region of the image to avoid any spillover from the edge pel to the adjacent white pel.

The preferred embodiments thus provide a technique that reduces toner in all black filled areas in a manner that not only substantially reduces toner but that also minimizes EMI radiation and pollution. Toner is saved by using sub-pel pulse width modulation to use less toner in the pel and by aligning the sub-pel regions next to each other in adjacent pels to minimize the number of times the laser beam must be switched on and off. However, alternative output values for edge and dense area pels may be provided to reduce toner and maintain image quality. The copending patent application "Method, System, And Program For Producing a Look-up Table to Enhance Print Quality", having attorney docket no. BLD990036US1, which was incorporated by reference above, provides further techniques for encoding values in the LUT to enhance image quality.

20

#### Alternative Embodiments and Conclusions

This concludes the description of the preferred embodiments of the invention. The following describes some alternative embodiments for accomplishing the present invention.

25 The preferred embodiments may be implemented as a method, apparatus or article of manufacture using standard programming and/or engineering techniques to produce software, firmware, hardware, or any combination thereof. The term "article of manufacture" (or alternatively, "computer program product") as used herein is intended to encompass one or more computer programs and/or data files accessible



from one or more computer-readable devices, carriers, or media, such as magnetic storage media, "floppy disk," CD-ROM, optical disks, holographic units, volatile or non-volatile electronic memory, a file server providing access to the programs via a network transmission line, wireless transmission media, signals propagating through space, etc. Of course, those skilled in the art will recognize many modifications may be made to this configuration without departing from the scope of the present invention.

In preferred embodiments, there are binary values for each pel. However, in alternative embodiments there may be more than two values for each pel. In such case, the LUTs 14a, b, c, d would have to provide different output values for the multiple possible pel values.

In preferred embodiment, the control logic is implemented as hardware, e.g., a Field Programmable Gate Array (FPGA), Application Specific Integrated Circuit (ASIC), etc. In alternative embodiments, the control logic may be implemented as programmable code in a programmable processor.

In preferred embodiments, there was one LUT 14a, b, c, d for each different type of print mode. In alternative embodiments, there may be multiple LUT tables for the same print mode and, at the same time, different LUT tables for different print modes.

Examples of print modes, such as print quality enhancement and toner reduction were described. However, additional LUTs may be provided for any different type of filtering operation that may be used to modify the pulse width for a pel to alter the appearance of the output and/or reduce the toner used.

In preferred embodiments, there is a LUT SRAM 12 and scan SRAM 10. These SRAMs 10 and 12 may be implemented in the same SRAM chip or dispersed throughout multiple SRAM chips. In alternative embodiments, the LUTs 14a, b, c, d may be maintained in a magnetic memory, as opposed to an electronic memory such as an SRAM. Still further, the LUTs 14a, b, c, d may be encoded in hardware logic, such as ASICs, FPGAs, Electronically Erasable Programmable Read-Only-Memory

(EEPROM), etc. In alternative embodiments, any type of volatile memory device may be used for the SRAMs 10 and 12. However, in preferred embodiments, the LUTs 14a, b, c, d are all maintained in the same high-speed memory to allow the control logic 4 to switch between LUTs 14a, b, c, d within the pel frequency to  
5 maintain printer throughput. In alternative embodiments, the LUTs may be switched at frequencies less or greater than the pel frequency. The LUTs may be programmed using Verilog, which may then be used to generate the hardware.

In preferred embodiments, the window of data considered has a diamond shape. However, different shaped windows of pel data may be used with the  
10 preferred embodiment dynamic LUT table technique. Further, more or less pels may be included in the window than the thirteen pel bits describe above.

In preferred embodiments, the LUTs provide a single output pel value for the center pel in the window. In alternative embodiments, the LUT may provide multiple substitute modified pulse values for multiple pels in the window.

15 Further, the preferred embodiments described the use of the 1-3-1 cross shape 64 used to determine whether a pel is located within an all black filled area and the patterns shown in FIGs. 6a, b, c, d to determine whether a pel is on an image edge. However, in alternative embodiments, alternative pattern checking may be performed by either the algorithm or encoded in the toner reduction LUT table to determine  
20 whether a pel is in an all black dense region or on an image edge.

In preferred embodiments, toner was reduced in an all black filled area by using location information encoded into the pels to align sub-pel regions in adjacent pels to provide a sub-pel checkerboard pattern that reduces EMI emissions. In alternative embodiments, the position information may be used in alternative ways to  
25 reduce toner. For instance, every other pel, as determined by the location information, in an all black region can be set to white to provide a checkerboard pattern in the all dense area in a manner that does not degrade the image edges. Still further techniques than those described above may be used to encode the toner reduction LUT output values for pels on an edge or not within an all black filled area.

In preferred embodiments, the laser printer uses the laser to write or discharge the photoconductor voltage in the areas of the image defined as black (or areas where toner is to be placed). The toner color could be black, magenta, cyan, yellow, or other convenient color. This process is known in the industry as "discharge area development" (DAD), where toner adheres only to areas where the photoconductor is discharged. An alternative embodiment where the charges are the opposite of the DAD system is known in the art as "charge area development" (CAD). The CAD process is used in all electrophotography copiers. With CAD, the laser is used to write or discharge the photoconductor voltage in image areas that are white (or areas where toner is not to be placed). Again the toner color could be black, magenta, cyan, yellow, or any other color. Toner adheres only to areas where the photoconductor is charged, which in the CAD process are those areas not impacted by the laser. In the CAD process, the photoconductor latent electrostatic image is the "negative" of the photoconductor latent electrostatic image in the DAD process.

For the CAD process, the toner reduction LUT would consider patterns that are the opposite of those considered for the DAD process where the center pel is black. Thus, the same pulse width and position information provided for the LUTs 14a, b, c, d described above having a black center pel would be provided for white center pels having a surrounding pattern the opposite of the pattern provided for the black center pel. With the CAD process, the sub-pulse width power would charge those pels which are white so that toner will not be attracted to the sub-pel regions charged by the laser.

In summary, preferred embodiments disclose a method, system, and program for reducing toner in an image comprised of raster pel data. A determination is made of pels surrounding subject pels. For each subject pel, a sub-pulse width power is generated to charge a sub-pel region within the subject pel based on a pattern of the surrounding pels of the subject pel. Further, for each subject pel, position information is generated indicating an alignment of the sub-pel region in the pel. The position

information is used to position the sub-pel region produced by the sub-pulse width power in the pel.

The foregoing description of the preferred embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be  
5 exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto. The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since  
10 many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

WHAT IS CLAIMED IS:

1           1.       A method for reducing toner in an image comprised of raster pel data,  
2 comprising:  
3           determining surrounding pels of subject pels;  
4           for each subject pel, generating a sub-pulse width power to charge a sub-pel  
5 region within the subject pel based on a pattern of the surrounding pels of the subject  
6 pel; and  
7           for each subject pel, generating position information indicating an alignment of  
8 the sub-pel region in the pel, wherein the position information is used to position the  
9 sub-pel region produced by the sub-pulse width power in the pel.

1           2.       The method of claim 1, wherein toner is attracted to the charged sub-  
2 pel region.

1           3.       The method of claim 1, wherein the position information clusters the  
2 sub-pel region of adjacent pels in order to reduce electrogmanetic radiation.

1           4.       The method of claim 1, further comprising:  
2           for each subject pel, determining whether the pattern of the surrounding pels  
3 indicates that the subject pel is in a black filled region, wherein the position  
4 information is used to align the sub-pel region in the subject pel in the black filled  
5 region to be adjacent to the sub-pel region in one adjacent subject pel in the black  
6 filled region.

1           5.       The method of claim 4, wherein the alignment of the sub-pels forms a  
2 checkerboard pattern.

1           6.       The method of claim 1, wherein the sub-pulse width power and  
2 position information is encoded in a look-up table that provides one output sub-pulse

1 width power and position information for an input subject pel and surrounding pel  
2 pattern.

1 7. The method of claim 4, wherein the surrounding pels include pels from  
2 the scan line including the subject pel and from scan lines adjacent to the subject pel,  
3 wherein the subject pel is in the black filled region if a plurality of the surrounding  
4 pels are all black.

1 8. The method of claim 7, wherein the subject pel is in the black filled  
2 region if the plurality of the pels that surround the subject pel that are all black form a  
3 cross shape.

1 9. The method of claim 7, wherein the surrounding pels and subject pel  
2 form a data window of pels, further comprising:  
3 encoding pel positions in the data window to include location information of  
4 the subject pel with respect to other pels if the subject pel is in one black filled region;  
5 and  
6 using the position information to align the sub-pel regions in the subject pels in  
7 the black filled region to be adjacent to the sub-pel region in one adjacent subject pel  
8 in the black filled region.

1 10. The method of claim 9, wherein the data window forms a diamond  
2 shape with the subject pel at the center of the diamond shaped window.

1 11. The method of claim 9, wherein the sub-pulse width power and  
2 position information are encoded in a look-up table that provides one output value  
3 including sub-pulse width power and position information for an input subject pel and  
4 surrounding pel pattern, and wherein the look-up table is encoded to provide the  
5 position information that is used to align sub-pel regions in pels in the black filled

1 region to be adjacent to the sub-pel region in one adjacent subject pel for input data  
2 windows that are encoded with position information.

1 12. The method of claim 7, wherein the surrounding pels and subject pel  
2 form a data window of pels, further comprising, for each subject pel:  
3 determining from the pels in the data window whether the subject pel is on an  
4 edge of an image of black pels; and  
5 using the data window as input to a look-up table that provides one output  
6 sub-pulse width power and position information for different input data window  
7 patterns including patterns that indicate that the subject pel is in one black filled  
8 region or on one image edge.

1 13. The method of claim 12, wherein the look-up table is encoded to align  
2 pels on the edge toward the black filled region.

1 14. The method of claim 12, wherein the look-up table is encoded to  
2 provide a sub-pulse width power level for pels on the edge that is less than the sub-  
3 pulse width power level for pels in the black filled region.

1 15. A system for reducing toner in an image comprised of raster pel data,  
2 comprising:  
3 means for determining surrounding pels of subject pels;  
4 means for generating, for each subject pel, a sub-pulse width power to charge  
5 a sub-pel region within the subject pel based on a pattern of the surrounding pels of  
6 the subject pel; and  
7 means for generating, for each subject pel, position information indicating an  
8 alignment of the sub-pel region in the pel, wherein the position information is used to  
9 position the sub-pel region produced by the sub-pulse width power in the pel.

1           16.    The system of claim 15, wherein toner is attracted to the charged sub-  
2 pel region.

1           17.    The system of claim 15, wherein the position information clusters the  
2 sub-pel region of adjacent pels in order to reduce electromagnetic radiation.

1           18.    The system of claim 16, further comprising:  
2           means for determining, for each subject pel, whether the pattern of the  
3 surrounding pels indicates that the subject pel is in a black filled region, wherein the  
4 position information is used to align the sub-pel region in the subject pel in the black  
5 filled region to be adjacent to the sub-pel region in one adjacent subject pel in the  
6 black filled region.

1           19.    The system of claim 18, wherein the alignment of the sub-pels forms a  
2 checkerboard pattern.

1           20.    The system of claim 15, wherein the sub-pulse width power and  
2 position information is encoded in a look-up table that provides one output sub-pulse  
3 width power and position information for an input subject pel and surrounding pel  
4 pattern.

1           21.    The system of claim 17, wherein the surrounding pels include pels  
2 from the scan line including the subject pel and from scan lines adjacent to the subject  
3 pel, wherein the subject pel is in the black filled region if a plurality of the  
4 surrounding pels are all black.

1           22.    The system of claim 21, wherein the subject pel is in the black filled  
2 region if the plurality of the pels that surround the subject pel that are all black form a  
3 cross shape.



1           23.     The system of claim 21, wherein the surrounding pels and subject pel  
2 form a data window of pels, further comprising:

3                 means for encoding pel positions in the data window to include location  
4 information of the subject pel with respect to other pels if the subject pel is in one  
5 black filled region; and

6                 means for using the position information to align the sub-pel regions in the  
7 subject pels in the black filled region to be adjacent to the sub-pel region in one  
8 adjacent subject pel in the black filled region.

1           24.     The system of claim 23, wherein the data window forms a diamond  
2 shape with the subject pel at the center of the diamond shaped window.

1           25.     The system of claim 23, wherein the sub-pulse width power and  
2 position information are encoded in a look-up table that provides one output value  
3 including sub-pulse width power and position information for an input subject pel and  
4 surrounding pel pattern, and wherein the look-up table is encoded to provide the  
5 position information that is used to align sub-pel regions in pels in the black filled  
6 region to be adjacent to the sub-pel region in one adjacent subject pel for input data  
7 windows that are encoded with position information.

1           26.     The system of claim 21, wherein the surrounding pels and subject pel  
2 form a data window of pels, further comprising, for each subject pel:

3                 means for determining from the pels in the data window whether the subject  
4 pel is on an edge of an image of black pels; and

5                 means for using the data window as input to a look-up table that provides one  
6 output sub-pulse width power and position information for different input data  
7 window patterns including patterns that indicate that the subject pel is in one black  
8 filled region or on one image edge.

1           27.     The system of claim 26, wherein the look-up table is encoded to align  
2     pels on the edge toward the black filled region.

1           28.     The system of claim 26, wherein the look-up table is encoded to  
2     provide a sub-pulse width power level for pels on the edge that is less than the sub-  
3     pulse width power level for pels in the black filled region.

1           29.     A computer-readable transmission medium including a look-up table  
2     data structure used for reducing toner in an image comprised of raster pel data,  
3     comprising:  
4           a plurality of output values, wherein one output value is provided for at least  
5     one pattern of pels including a subject pel, wherein the output value is substituted for  
6     the subject pel, and wherein the output value comprises a sub-pulse width power to  
7     charge a sub-pel region within the subject pel based and position information  
8     indicating an alignment of the sub-pel region in the pel, wherein the position  
9     information is used to position the sub-pel region produced by the sub-pulse width  
10    power in the pel.

1           30.     The computer-readable transmission medium of claim 29, wherein  
2     toner is attracted to the charged sub-pel region.

1           31.     The computer-readable transmission medium of claim 29, wherein the  
2     position information clusters the sub-pel region of adjacent pels in order to reduce  
3     electrostatic radiation.

1           32.     The computer-readable transmission medium of claim 29, wherein the  
2     output values for subject pels in a black filled region include position information that  
3     aligns the sub-pel region in the subject pels in the black filled region to be adjacent to  
4     the sub-pel region in one adjacent subject pel in the black filled region.

1           33.     The computer-readable transmission medium of claim 32, wherein the  
2     position information for the output values of subject pels in the black filled region  
3     aligns the sub-pel regions to form a checkerboard pattern.

1           34.     The computer-readable transmission medium of claim 33, wherein the  
2     subject pels are in the black filled region if a plurality of the surrounding pels are all  
3     black.

1           35.     The computer-readable transmission medium of claim 34, wherein the  
2     subject pel is in the black filled region if the plurality of the pels that surround the  
3     subject pel that are all black form a cross shape.

1           36.     The computer-readable transmission medium of claim 29, wherein the  
2     surrounding pels for which an output value is provided in the look-up table data  
3     structure form a diamond shape with the subject pel at the center of the diamond  
4     shaped window.

1           37.     The computer-readable transmission medium of claim 29, wherein the  
2     output values for subject pels on an image edge are encoded with position information  
3     to align the subject pels on the image edge toward a black filled region.

1           38.     The computer-readable transmission medium of claim 29, wherein the  
2     output values for subject pels on the image edge are encoded with a sub-pulse width  
3     power level that is less than the sub-pulse width power level for pels in the black filled  
4     region.

METHOD, SYSTEM, AND PROGRAM FOR REDUCING  
TONER USAGE IN PRINT OUTPUT

ABSTRACT

Disclosed is a method, system, and program for reducing toner in an image  
5 comprised of raster pel data. A determination is made of pels surrounding subject  
pels. For each subject pel, a sub-pulse width power is generated to charge a sub-pel  
region within the subject pel based on a pattern of the surrounding pels of the subject  
pel. Further, for each subject pel, position information is generated indicating an  
alignment of the sub-pel region in the pel. The position information is used to position  
10 the sub-pel region produced by the sub-pulse width power in the pel.

FIG. 1

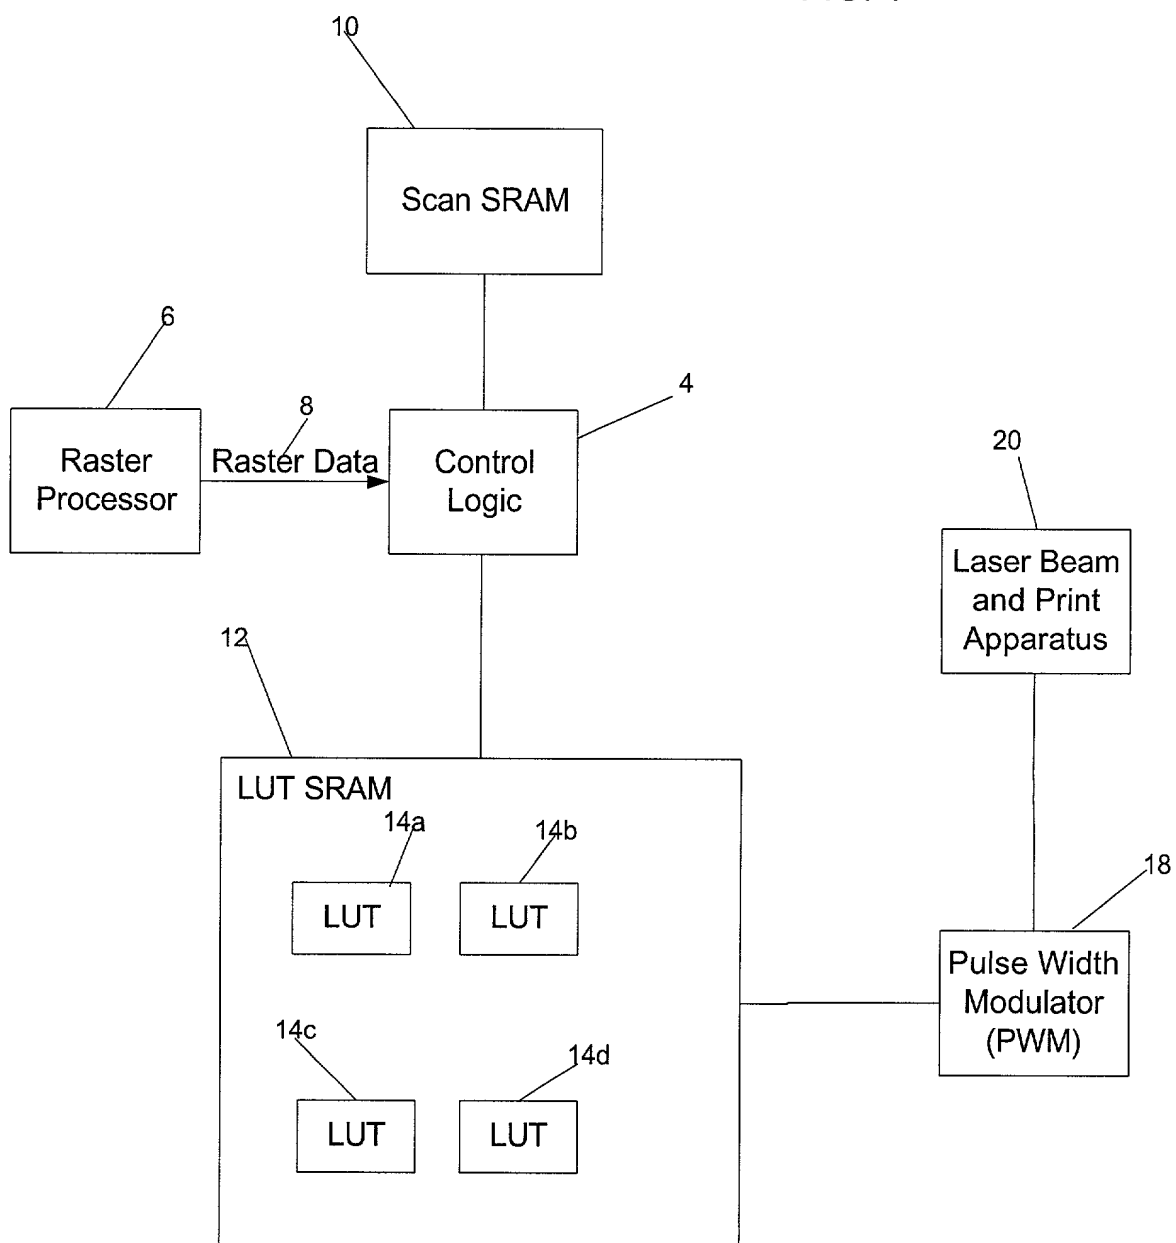


FIG. 2

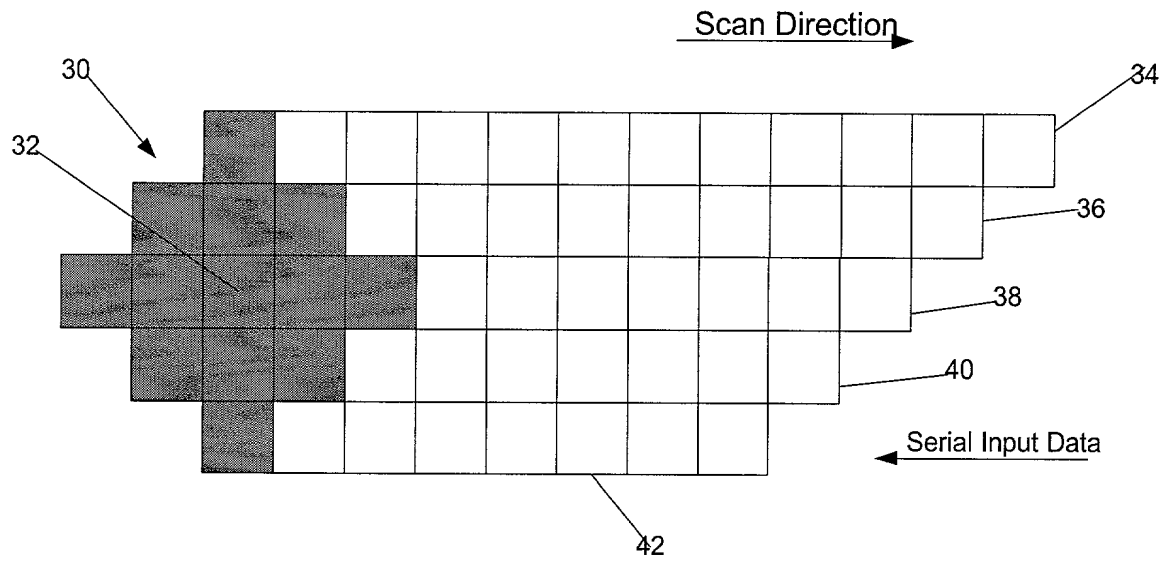


FIG. 3

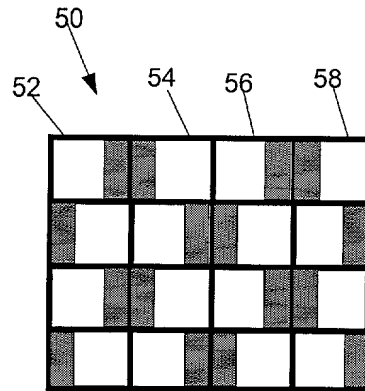


FIG. 4

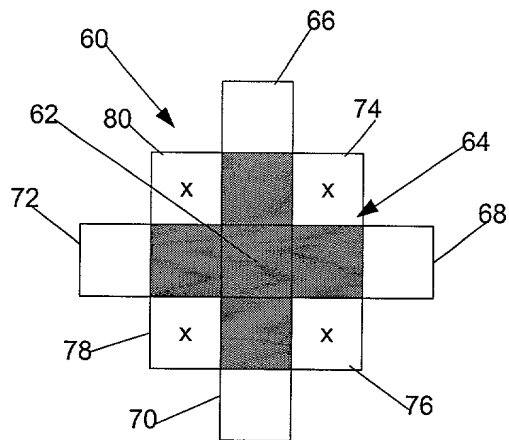


FIG. 5

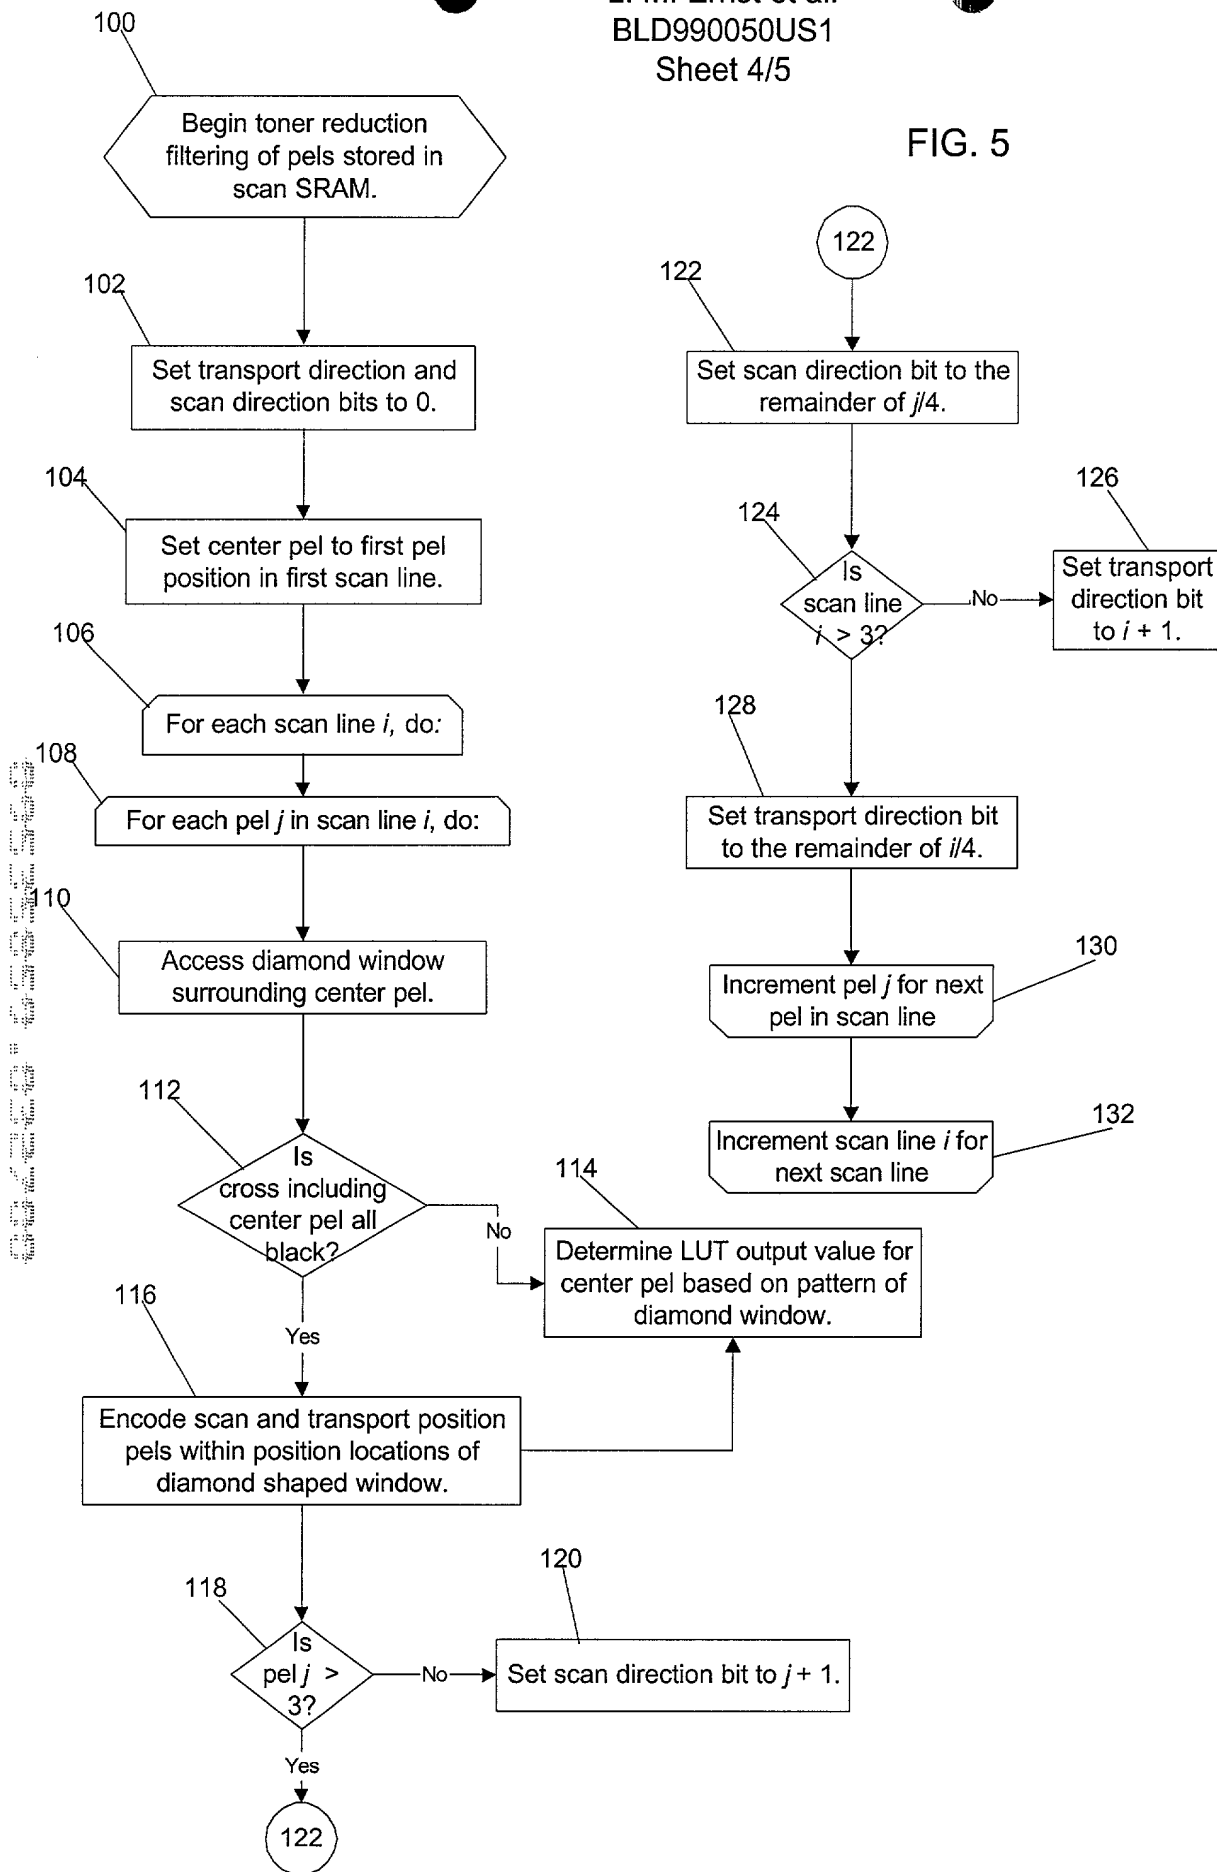




FIG. 6a




FIG. 6b




FIG. 6c





FIG. 6d



MAR 27 '00 16:13

F IBM

TO 9131 67984

PAGE.011/013

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION****DOCKET:**  
**BLD990050US1**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**METHOD, SYSTEM, AND PROGRAM FOR REDUCING TONER USAGE IN PRINT OUTPUT**

the specification of which (check one)

☒ has attorney docket no. BLD990050US1  
\_\_\_\_\_ was filed on \_\_\_\_\_  
as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>None</u>	<u>                    </u>	<u>                    </u>	<u>Yes</u>	<u>No</u>
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>None</u>	<u>                    </u>	<u>                    </u>
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

MAR 27 '00 16:14

F IBM

TO 9131 67984

PAGE.012/013

## DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DOCKET:  
BLD990050US1

**POWER OF ATTORNEY:** Joseph F. Villella, Jr., Reg. No. 30,599; David W. Victor, Reg. No. 39,867; William K. Konrad, Reg. No. 28,868; Gary D. Mann, Reg. No. 34,867; Alan S. Raynes, Reg. No. 39,809; Esther E. Klein, Reg. No. 34,337; Robert B. Martin, Reg. No. 26,945; Paik Saber, Reg. No. 37,494; Leslie G. Murray, Reg. No. 31,183; Christopher A. Hughes, Reg. No. 26,914; Joseph C. Redmond, Jr., Reg. No. 18,753; Douglas R. Millett, Reg. No. 31,784; John E. Hoel, Reg. No. 26,279; Edward A. Pennington, Reg. No. 32,588; Noreen A. Krall, Reg. No. 39,734; Robert M. Sullivan, Reg. No. 39,391; G. Marlin Knight, Reg. No. 33,409; Randall J. Bluestone, Reg. No. 40,518; Abdolreza Raissinia, Reg. No. 38,686.

Send correspondence to:

David Victor, Esq  
1180 South Beverly Dr., Ste. 501  
Los Angeles, CA 90035

Direct all telephone calls to David Victor at (310) 553-7977

**FULL NAME OF INVENTOR TWO:** Larry M. ErnstINVENTORS SIGNATURE: *Larry M. Ernst*DATE: *3/27/2000*

RESIDENCE: 2336 Corey Street, Longmont, Colorado 80501

CITIZENSHIP: U.S.

POST OFFICE ADDRESS: same as residence**FULL NAME OF INVENTOR ONE:** Danielle Kathryn DittrichINVENTORS SIGNATURE: *Danielle K. Dittrich*DATE: *3/24/00*

RESIDENCE: 14 12th Avenue, Longmont, Colorado 80501

CITIZENSHIP: U.S.

POST OFFICE ADDRESS: same as residence**FULL NAME OF INVENTOR THREE:** Richard S. LuckyINVENTORS SIGNATURE: *Richard S. Lucky*DATE: *3/24/00*

RESIDENCE: 143 W. Elm, Louisville, Colorado 80027

CITIZENSHIP: U.S.

POST OFFICE ADDRESS: same as residence